

# Apacer

The Most **Reliable**  
Storage For Industries

**PT160-M280 CET**



### Overview

Apacer PT160-M280 Commercial Extended Temperature is the fastest SSD designed with M.2 2280 mechanical dimensions, providing full compliance with PCIe Gen4 x4 interface and NVMe 1.4 specifications. This enables it to operate in power management modes and significantly reduce power consumption. Equipped with a powerful PCIe controller supporting on-the-module ECC and an efficient wear leveling scheme, PT160-M280 delivers exceptionally low latency and outstanding performance in data transfer. With its compact size and high-speed storage, PT160-M280 is the ideal choice for larger, faster hosts deployed across a wide range of applications that demand exceptional performance.



Utilizing 3D NAND technology for capacities up to 8TB and delivering superior power efficiency compared to 2D NAND, PT160-M280 goes beyond mere storage. It integrates an LDPC (Low Density Parity Check) ECC engine to enhance SSD endurance and data reliability. Additionally, it features a built-in thermal sensor that monitors SSD temperature through S.M.A.R.T commands, coupled with thermal throttling to dynamically adjust frequency scaling, ensuring sustained performance while preventing overheating.

To ensure reliable operation in harsh conditions, Apacer has integrated Sidefill technology, enhancing product durability and resistance to various thermal and mechanical stresses. Furthermore, the inclusion of a graphene heat spreader aids in maintaining optimal operating temperatures, ensuring the SSD remains cool and functions correctly. For demanding applications, PT160-M280 also features End-to-End Data Protection, which safeguards data integrity at multiple points along the data transfer path, enabling dependable delivery of data transfers.

In terms of security, Advanced Encryption Standard (AES) and Trusted Computing Group (TCG) Opal (optional) safeguard data, giving users peace of mind that their information is protected against unauthorized access. PT160-M280 also includes advanced features, including flash block management, power failure management, TRIM, page mapping, SMART Read Refresh, NVMe secure erase, and power saving modes.

With exceptional performance, reliable dependability, and enhanced data protection, PT160-M280 is the ideal storage or cache solution for a variety of applications, including industrial, imaging, computing, and enterprise markets.

## Feature


- Supports large capacity of up to 8GB
- Adopts advanced LDPC ECC engine with 3D NAND flash memory to improve reliability
- Global Wear Leveling
- Flash bad-block management
- Flash Translation Layer: Page Mapping
- Supports SSDWidget S.M.A.R.T function
- CoreGlacier™ heatsink technology
- Power Failure Management
- Support TCG Opal 2.0/AES 256-bit encryption
- End-to-End Data Protection
- TRIM Support
- SMART Read Refresh™
- NVMe Secure Erase

## Specifications

<b>Model</b>	PT160-M280 Commercial Extended Temperature
<b>Interface</b>	PCIe Gen4 x4
<b>Connector</b>	Double-sided M.2 2280-M
<b>Form Factor</b>	M.2 2280
<b>NAND Flash Type</b>	3D TLC
<b>Capacity</b>	4TB ~ 8TB
<b>External DRAM</b>	Yes
<b>Sustained Read Performance (MB/sec)</b>	Up to 6970
<b>Sustained Write Performance (MB/sec)</b>	Up to 2310
<b>ECC Engine</b>	Low-Density Parity-Check (LDPC) Code
<b>IOPs (4K Random Write)</b>	517K
<b>Extended Operating Temperature ( °C )</b>	CET -25°C to 85°C
<b>Storage Temperature ( °C )</b>	-55 ~ + 100
<b>Thermal sensor</b>	Yes
<b>Shock</b>	Operating: Acceleration, 50(G)/11(ms)/half sine (compliant with MIL-STD-202G) Non-operating: Acceleration, 1500(G)/0.5(ms)/half sine (compliant with MIL-STD-883K)
<b>Vibration</b>	Operation: 7.69 Grms, 20~2000 Hz/random (compliant with MIL-STD-810G) Non-operation: 4.02 Grms, 15~2000 Hz/random (compliant with MIL-STD-810G)
<b>Operating Voltage</b>	3.3V ±5%
<b>Power Consumption</b>	Active mode: 3750 mA / Idle mode: 900 mA
<b>Dimension (L x W x H )</b>	22.00 x 80.00 x 4.08 (max) (mm)
<b>MTBF (hours)</b>	>3,000,000

## Mechanical Specification

Top View

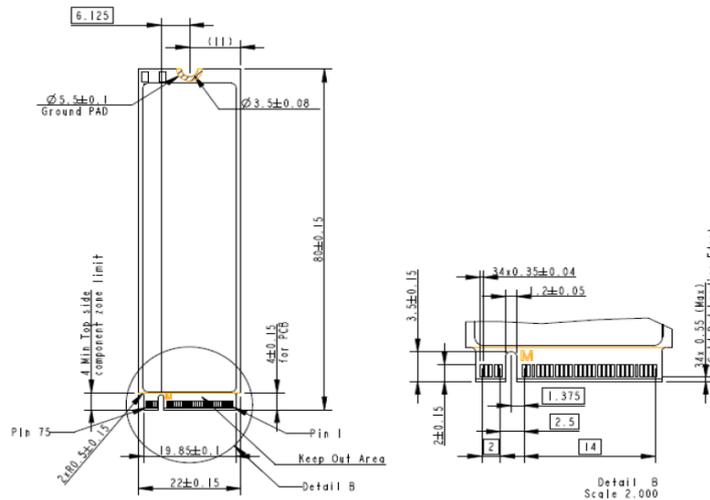

Bottom View

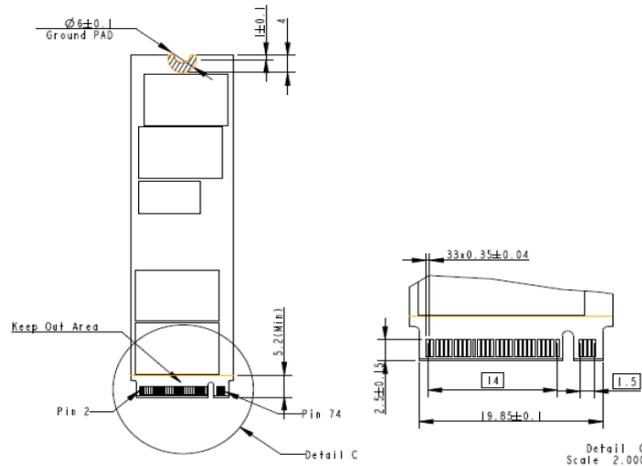


Figure 9-1 Physical Dimensions

For more information,  
contact your Apacer representative

### Global Presence

Taiwan (Headquarters)  
Apacer Technology Inc.  
Tel: +886-2-2267-8000  
Fax: +886-2-2267-2261

Europe  
Apacer Technology B.V.  
Tel: +31-40-267-0000  
Fax: +31-40-290-0686

U.S.A.  
Apacer Memory America, Inc.  
Tel: +1-408-518-8699  
Fax: 1-510-249-9551

Shanghai  
Apacer Electronic(Shanghai)  
Co., Ltd.  
Tel: +86-21-6228-9939

Japan  
Apacer Technology Corp.  
Tel: +81-3-5419-2668  
Fax: +81-3-5419-0018

India  
Apacer Technologies Pvt. Ltd.  
Tel: +91-80-41529061~3  
Fax: +91-80-41700215