

Apacer

The Most **Reliable**
Storage For Industries

ST250-M280 CET



ST250-M280 CET

Overview

Apacer ST250-M280 is the next-generation Solid State Drive (SSD) with compact and high-speed storage. Designed with a SATA 6 Gb/s interface, ST250-M280 provides full compliance with the latest SATA Revision 3.2 interface specifications and delivers exceptional read/write speeds, making it the leading add-in storage solution for future host computing systems.

Utilizing 3D NAND technology for capacities up to 2TB and offering superior power efficiency than 2D NAND, ST250-M280 is equipped with a robust SATA controller supporting on-the-module ECC and efficient wear leveling scheme. It also features an LDPC (Low Density Parity Check) ECC engine to enhance SSD endurance and data reliability. Additionally, ST250-M280 includes a built-in thermal sensor for monitoring SSD temperature via S.M.A.R.T commands, preventing overheating. Operating at a 6 Gb/s interface, it comes with Apacer's latest S.M.A.R.T. technology, tailored for monitoring and analyzing the lifespan of SATA interface SSDs. For demanding applications, End-to-End Data Protection ensures data integrity at multiple transfer points, facilitating reliable data delivery.

In terms of security, Advanced Encryption Standard (AES) provides robust protection, ensuring data is safeguarded against unauthorized access at all times. ST250-M280 also incorporates various advanced features, including flash block management, DataDefender, ATA secure erase, TRIM, page mapping, device sleep, Hyper Cache technology, power saving modes, and SMART Read Refresh.

With its exceptional performance, proven reliability, and enhanced data protection, ST250-M280 is an ideal storage or cache solution for a wide range of applications, from industrial and imaging to computing and enterprise markets.



Feature

- Low-Density Parity-Check (LDPC) Code
- Global Wear Leveling
- Flash bad-block management
- Flash Translation Layer: Page Mapping
- S.M.A.R.T.
- DataDefender™
- ATA Secure Erase
- TRIM
- Device Sleep
- Hyper Cache Technology
- SATA Power Management
- DataRAID
- SMART Read Refresh

Specifications

Model	ST250-M280 CET
Interface	SATA 3.2 (6Gb/s)
Connector	M.2 B & M key
Form Factor	Single-sided: M.2 2280-S3-B-M Double-sided: M.2 2280-D5-B-M
NAND Flash Type	3D TLC
Capacity	128GB~2TB
External DRAM	N
Sequential Read Performance (MB/sec)	Up to 560
Sequential Write Performance (MB/sec)	Up to 515
ECC Engine	Low-Density Parity-Check (LDPC) Code
IOPS (4K Random Write)	67K
Standard Operating Temperature (°C)	CET -25°C to 85°C
Extended Operating Temperature (°C)	-
Storage Temperature (°C)	-55°C to 100°C
Thermal Sensor	Yes
Shock	Operation: 50G/11ms (compliant with MIL-STD-202G) Non-operation: 1500G/0.5ms (compliant with MIL-STD-883K)
Vibration	Operation: 7.69 Grms, 20~2000 Hz/random (compliant with MIL-STD-810G) Non-operation: 4.02 Grms, 15 ~ 2000 Hz/sine (compliant with MIL-STD-810G)
Operating Voltage	3.3 V ± 5%
Power Consumption	Active mode: 410 mA / Idle mode: 65 mA
Dimension (L x W x H)	Single side: 80.00 mm x 22.00 mm x 2.38 mm Double side: 80.00 mm x 22.00 mm x 3.88 mm
MTBF (hours)	>3,000,000

Mechanical Specification

9.1 Single-sided Dimensions

Table 9-1 Physical Information

Parameter	Unit	128 GB	256 GB	512 GB
Length	mm	80.00 ± 0.15		
Width		22.00 ± 0.15		
Height (Max.)		2.38		
Weight	g ± 5%	4.92	5.37	5.62

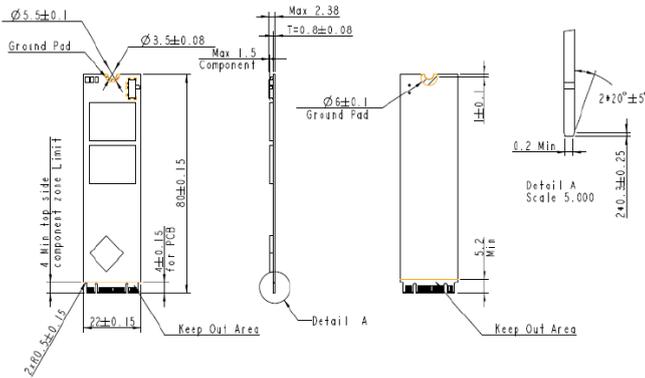


Figure 9-1 Single-sided Dimensions

9.2 Double-sided Dimensions

Table 9-2 Physical Information

Parameter	Unit	1 TB	2TB
Length	mm	80.00 ± 0.15	
Width		22.00 ± 0.15	
Height (Max.)		3.88	
Weight	g ± 5%	6.54	6.52

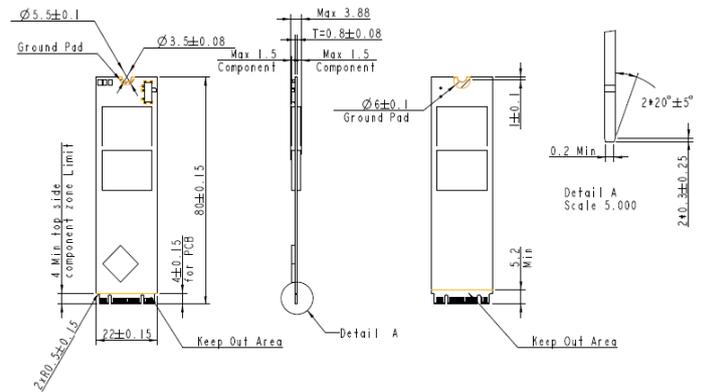


Figure 9-2 Double-sided Dimensions

For more information,
contact your Apacer representative

Global Presence

Taiwan (Headquarters)
Apacer Technology Inc.
Tel: +886-2-2267-8000
Fax: +886-2-2267-2261

Europe
Apacer Technology B.V.
Tel: +31-40-267-0000
Fax: +31-40-290-0686

U.S.A.
Apacer Memory America, Inc.
Tel: +1-408-518-8699
Fax: 1-510-249-9551

Shanghai
Apacer Electronic(Shanghai)
Co., Ltd.
Tel: +86-21-6228-9939

Japan
Apacer Technology Corp.
Tel: +81-3-5419-2668
Fax: +81-3-5419-0018

India
Apacer Technologies Pvt. Ltd.
Tel: +91-80-41529061~3
Fax: +91-80-41700215