


Apacer



Apacer Consumer & Gaming Solutions

**Access Limitless Potential
From Inspired Ideas to Unstoppable Wins**

Brochure



In a World

Where Data Drives Every Decision,

Apacer leads the charge in technology innovation, providing state-of-the-art SSD and DRAM solutions tailored to both consumer and industrial needs. From purpose-driven applications to immersive entertainment, we ensure seamless data storage, fast processing, and unmatched reliability for a wide spectrum of use cases.


At Apacer, we go beyond delivering products — we partner with you to solve challenges, optimize performance, and future-proof your operations. With our commitment to excellence and a focus on empowering businesses and individuals, we help you unlock the full potential of your data.

Access the Best — Where Reliability Meets Innovation.

“At Apacer, innovation is at the heart of everything we do. We're unlocking the full potential of data, no matter where it resides, and delivering transformative solutions that drive business growth and enrich lives worldwide.”

Gibson Chen

President of Apacer

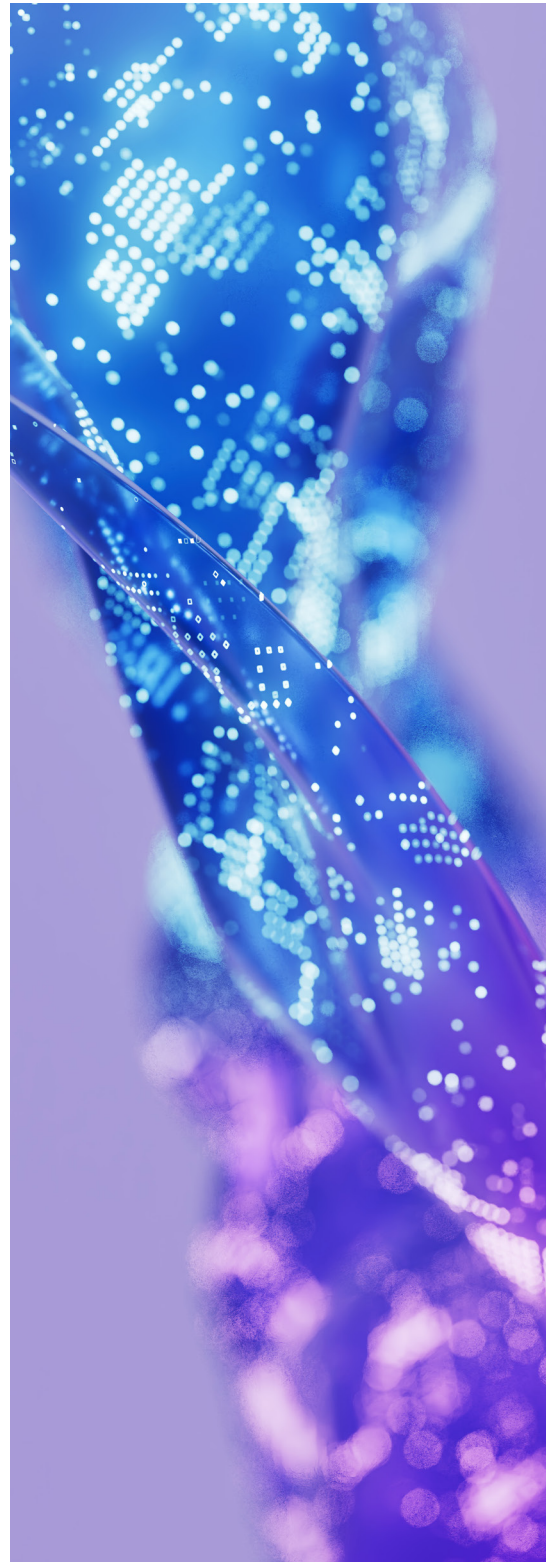



Purpose-Built SSD for Consumer Applications

Apacer offers high-performance and stylish storage solutions designed to meet the needs of consumer's daily lives. Not only built for reliability, endurance, and speed, but also uplift personal's experience. Our purpose-built SSD ensure smooth and seamless operation, whether you're managing demanding tasks, handling large files, or creating on the go. Elevate your works, entertainment, and lifestyle with multi-choice storages you can depend on.



Data Integrity



End-to-End Data Protection

Ensures Data Integrity at Multiple Points

Apacer End-to-end Protection can improve system stability and enable reliable data transfers. This technology ensures error checking whenever data moves between the host, controller, DRAM, or NAND flash.



Smart Read Refresh™

Ensure Data Access Over Time

Apacer Smart Read Refresh provides a more durable experience. The data will be rewritten to a different block to prevent read disturb errors and reduce the risk of corruption or loss.

Longevity



S.M.A.R.T.

Self-monitoring System to Monitor SSD Status

Apacer S.M.A.R.T. is an early warning system to help users avoid unexpected downtime and offers real-time indicators of SSD health and potential issues.



Apacer SSD Utility

Proactive SSD Health Management for Continuity

Apacer's SSD Utility provides a user-friendly interface for real-time SSD health monitoring and workload analysis, preventing failures from excessive tasks in demanding environments.



PCIe/SATA M.2 SSD

Features

- **Various Interface and Capacities** - Provide high performance and up to 8TB to meet users' demanding tasks.
- **Cooling Function Designs** - Offer heatsink and heat spreader product choice for purposed heat dissipation need.
- **Advanced Data Protection Mechanism** - Provide Global Wear-leveling and Smart Read Refresh™ to ensure data integrity.
- **Self-monitoring System** - Provide S.M.A.R.T. Support and SSD Utility to monitor SSD status.



Model	AS2280F4U	AS2280F4	AS2280F4L
Capacity	1TB/2TB/4TB	1TB/2TB/4TB	1TB/2TB
Interface	PCIe Gen5 x4	PCIe Gen5 x4	PCIe Gen5 x4
NAND Flash	3D NAND	3D NAND	3D NAND
Sequential Read/Write (MB/s) (Max)*	14000/13000	12400/12000	10500/8700
Operating Temperature (°C)	0°C ~ 70°C	0°C ~ 70°C	0°C ~ 70°C
MTBF (Hours)	>1,600,000	>1,600,000	>1,600,000
Dimensions (mm)	(L)80.00 x (W)22.00 x (H)3.50	(L)80.00 x (W)22.00 x (H)3.50	(L)80.00 x (W)22.00 x (H)2.38
Warranty	5 years or TBW**, whichever occurs first		

*The performance may vary due to host hardware, software, usage and storage capacity.

**Terabytes Written (TBW): represents the total number of bytes that can be written before the SSD becomes unwritable. The larger the TBW value, the more resistant the SSD is to writing and the better the durability.





Model	AS2280Q4U for PS5	AS2280Q4X	AS2280P4U PRO
Capacity	512GB/1TB/2TB/4TB/8TB	512GB/1TB/2TB/4TB	256GB/512GB/1TB/2TB
Interface	PCIe Gen4 x4	PCIe Gen4 x4	PCIe Gen3 x4
NAND Flash	3D NAND	3D NAND	3D NAND
Sequential Read/Write (MB/s) (Max)*	7400/7000	5000/4400	3500/3000
Operating Temperature (°C)	0°C ~ 70°C	0°C ~ 70°C	0°C ~ 70°C
MTBF (Hours)	>1,600,000	>1,500,000	>1,800,000
Dimensions (mm)	(L)80.00 x (W)22.90 x (H)10.80	Single side : (L)80.00 x (W)22.00 x (H)2.25 Double side : (L)80.00 x (W)22.00 x (H)3.50	Single side : (L)80.00 x (W)22.00 x (H)3.75 Double side : (L)80.00 x (W)22.00 x (H)5.00
Warranty	3 years or TBW**, whichever occurs first	5 years or TBW**, whichever occurs first	5 years or TBW**, whichever occurs first

*The performance may vary due to host hardware, software, usage and storage capacity.

**Terabytes Written (TBW): represents the total number of bytes that can be written before the SSD becomes unwritable. The larger the TBW value, the more resistant the SSD is to writing and the better the durability.





Model	AS2280P4X	AST280X
Capacity	256GB/512GB/1TB/2TB	128GB/256GB/512GB/1TB/2TB
Interface	PCIe Gen3 x4	SATA III
NAND Flash	3D NAND	3D NAND
Sequential Read/Write (MB/s) (Max)*	3000/2000	520/500
Operating Temperature (°C)	0°C ~ 70°C	0°C ~ 70°C
MTBF (Hours)	>1,500,000	>1,500,000
Dimensions (mm)	(L)80.00 x (W)22.00 x (H)2.25	(L)80.00 x (W)22.00 x (H)2.25
Warranty	3 years or TBW**, whichever occurs first	

*The performance may vary due to host hardware, software, usage and storage capacity.


**Terabytes Written (TBW): represents the total number of bytes that can be written before the SSD becomes unwritable. The larger the TBW value, the more resistant the SSD is to writing and the better the durability.



2.5" SATA SSD

Features

- **Advanced Data Protection Mechanism** - Provide Global Wear-leveling and Smart Read Refresh™ to ensure data integrity.
- **Self-monitoring System** - Provide S.M.A.R.T. Support and SSD Utility to monitor SSD status.




Model	AS350 PANTHER	AS350X
Capacity	128GB/256GB/512GB/1TB	128GB/256GB/512GB/1TB/2TB/4TB
Interface	SATA III	SATA III
NAND Flash	3D TLC	3D NAND
Sequential Read/Write (MB/s) (Max)*	560/540	560/540
Operating Temperature (°C)	0°C ~ 70°C	0°C ~ 70°C
MTBF (Hours)	>1,500,000	>1,500,000
Dimensions (mm)	(L)100.00 x (W)69.85 x (H)6.90	(L)100.00 x (W)69.85 x (H)6.90
Warranty	3 years or TBW**, whichever occurs first	

*The performance may vary due to host hardware, software, usage and storage capacity.

**Terabytes Written(TBW): represents the total number of bytes that can be written before the SSD becomes unwritable. The larger the TBW value, the more resistant the SSD is to writing and the better the durability.





Model	AS340 PANTHER	AS340X
Capacity	120GB/240GB/480GB/960GB	120GB/240GB/480GB/960GB
Interface	SATA III	SATA III
NAND Flash	3D TLC	3D NAND
Sequential Read/Write (MB/s) (Max)*	550/520	550/520
Operating Temperature (°C)	0°C ~ 70°C	0°C ~ 70°C
MTBF (Hours)	>1,500,000	>1,500,000
Dimensions (mm)	(L)100.00 x (W)69.85 x (H)6.90	(L)100.00 x (W)69.85 x (H)6.90
Warranty	3 years or TBW**, whichever occurs first	

*The performance may vary due to host hardware, software, usage and storage capacity.

**Terabytes Written (TBW): represents the total number of bytes that can be written before the SSD becomes unwritable. The larger the TBW value, the more resistant the SSD is to writing and the better the durability.







Portable SSD

Features

- **Multiple Designs and Magnetic Options** - Designed for diverse applications and users' needs.
- **Passed 1.22m Military-grade Drop Test** - Ensure data security in the event of accidental drops.
- **Self-monitoring System** - Provide S.M.A.R.T. Support and SSD Utility to monitor SSD status.









Model	AS741	AS725	AS724
Capacity	1TB/2TB/4TB	256GB/512GB/1TB	512GB/1TB/2TB
Interface	USB4 Gen3 x2	USB 3.2 Gen2	USB 3.2 Gen2
NAND Flash	3D NAND	3D NAND	3D NAND
Sequential Read/Write (MB/s) (Max)*	4000/3600	1000/1000	500/500
Operating Temperature (°C)	0°C ~ 70°C	0°C ~ 70°C	0°C ~ 70°C
Dimensions (mm)	(L)72.00 x (W)72.00 x (H)16.00	(L)63.00 x (W)63.00 x (H)10.50	(L)60.60 x (W)80.60 x (H)9.00
Warranty	3 years or TBW**, whichever occurs first	3 years or TBW**, whichever occurs first	3 years or TBW**, whichever occurs first
Features	 Shockproof	  Magnetic Shockproof	 Shockproof

*The performance may vary due to host hardware, software, usage and storage capacity.

**Terabytes Written (TBW): represents the total number of bytes that can be written before the SSD becomes unwritable. The larger the TBW value, the more resistant the SSD is to writing and the better the durability.









Model	AS723	AS722	AS713
Capacity	500GB/1TB/2TB	512GB/1TB	512GB/1TB
Interface	USB 3.2 Gen2 x2	USB 3.2 Gen2	USB 3.2 Gen2
NAND Flash	3D NAND	3D TLC	3D NAND
Sequential Read/Write (MB/s) (Max)*	2000/2000	1000/900	1000/900
Operating Temperature (°C)	0°C ~ 70°C	0°C ~ 70°C	0°C ~ 70°C
Dimensions (mm)	(L)79.10 x (W) 44.40 x (H) 8.50	(L)122.00 x (W)36.00 x (H)12.00	(L)115.00 x (W)38.00 x (H)11.00
Warranty	5 years or TBW**, whichever occurs first	3 years or TBW**, whichever occurs first	3 years or TBW**, whichever occurs first
Features	  Shockproof Pressure Resistant	  Shockproof Anti-vibration	  Shockproof Anti-vibration

*The performance may vary due to host hardware, software, usage and storage capacity.

**Terabytes Written (TBW): represents the total number of bytes that can be written before the SSD becomes unwritable. The larger the TBW value, the more resistant the SSD is to writing and the better the durability.





Model	AS712	AS711A
Capacity	1TB	250GB/500GB/1TB
Interface	USB 3.2 Gen2	USB 3.2 Gen2
NAND Flash	3D NAND	3D NAND
Sequential Read/Write (MB/s) (Max)*	1000/900	1040/925
Operating Temperature (°C)	0°C ~ 70°C	0°C ~ 60°C
Dimensions (mm)	SSD: (L)124.00 x (W)40.10 x (H)13.60 SSD+cradle: (L)185.00 x (W)57.00 x (H)36.50	(L)58.10 x (W)17.10 x (H)12.20
Warranty	3 years or TBW**, whichever occurs first	
Features	<div>     </div> <div> Essential Oil Diffuser Shockproof Shockproof Anti-vibration </div>	

*The performance may vary due to host hardware, software, usage and storage capacity.

**Terabytes Written (TBW): represents the total number of bytes that can be written before the SSD becomes unwritable. The larger the TBW value, the more resistant the SSD is to writing and the better the durability.










Military-grade Portable Hard Drive

Features









- **Passed 1.22m Military-grade Drop Test** - Ensure data security in the event of accidental drops.
- **Anti-vibration Function** - Equipped with internal suspension structure to absorb shocks and minimize damage.
- **Apacer Data Manager Software** - Ensure data integrity by one-way/two-way quick backup and easy synchronization.



Model	AC732	AC731	AC633
Capacity	1TB/2TB/4TB/5TB	1TB/2TB	1TB/2TB/4TB/5TB
Interface	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0
Color	Black	Black	Blue
Material	Aluminum, Plastic	Rubber, Plastic	Rubber, Plastic
Connector	USB-A	USB-A	USB-A
Dimensions (mm)	(L)138.60 x (W)94.00 x (H)23.50	(L)141.00 x (W)88.00 x (H)18.40	1TB/2TB : (L)139.50 x (W)88.36 x (H)21.60 4TB/5TB : (L)140.00 x (W)89.37 x (H)27.40
Weight	1TB/2TB : 320g, 4TB/5TB : 420g	238g	1TB/2TB : 269g, 4TB/5TB : 374g
Warranty	3 years	3 years	3 years
Features	 Pressure Resistant  Shockproof  IP68	 Anti-vibration  IP68	 Anti-vibration  IP55





Model	AC632	AC631	AC630
Capacity	1TB/2TB	1TB/2TB	1TB/2TB
Interface	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0
Color	Grey	Black	Black
Material	Aluminum Alloy	Rubber, Plastic	Rubber, Plastic
Connector	USB-A	USB-A	USB-A
Dimensions (mm)	(L)131.90 x (W)88.80 x (H)17.30	(L)152.96 x (W)93.00 x (H)21.00	(L)143.30 x (W)92.90 x (H)20.10
Weight	245g	263g (with cable)	250g (with cable)
Warranty	3 years	3 years	3 years
Features	 Pressure Resistant  Shockproof  Anti-fingerprint	 Shockproof  IP55  Cable Carry	 IP55  Cable Carry








Classic Portable Hard Drive



Features

- **Multiple Colors and Capacities to Choose** - Offer three colors and up to 4TB to meet users' demands.
- **LED Indicator** - Dual-color LED Light clearly identifies drive's current mode of operation.
- **Apacer Data Manager Software** - Ensure data integrity by one-way/two-way quick backup and easy synchronization.



Model	AC533	AC532
Capacity	1TB/2TB/4TB/5TB	1TB/2TB
Interface	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0
Color	Black/Red/Blue : 1TB/2TB Black : 4TB/5TB	Black/White
Material	Rubber, Plastic	Plastic
Connector	USB-A	USB-A
Dimensions (mm)	1TB/2TB : (L)133.45 x (W)79.40 x (H)17.20 4TB/5TB : (L)133.45 x (W)79.40 x (H)25.20	(L)132.40 x (W)82.00 x (H)16.10
Weight	1TB/2TB : 175.25g ; 4TB/5TB : 282g	190g
Warranty	3 years	3 years
Features	 Shockproof  LED	 Shockproof  Anti-vibration  LED



Model	AC237	AC236
Capacity	1TB/2TB/4TB/5TB	1TB/2TB/4TB/5TB
Interface	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (USB 3.0) ; backward compatible with USB 2.0
Color	Black/Red/Blue : 1TB/2TB Black : 4TB/5TB	Black/Red/Blue/Yellow : 1TB/2TB Black : 4TB/5TB
Material	Plastic	Plastic
Connector	USB-A	USB-A
Dimensions (mm)	1TB/2TB : (L)128.50 x (W)79.40 x (H)12.20 4TB/5TB : (L)128.50 x (W)79.40 x (H)20.20	1TB/2TB : (L)128.5 x (W)79.40 x (H)10.80 4TB/5TB : (L)128.5 x (W)79.40 x (H)19.20
Weight	1TB/2TB : 138.85g ; 4TB/5TB : 247.4g	1TB/2TB : 139.5g ; 4TB/5TB : 235g
Warranty	3 years	3 years
Features	 LED	 Ultra Slim








SD Card

Features

- **Complies with SD Association** - Ensure compatibility and stable performance with multiple applications.
- **Write Protect (SDXC UHS-II U3 V90)** - Shield your SD card from unauthorized or unintended changes.
- **ECC Engine (SDXC UHS-II U3 V90)** - Ensure reliable data integrity with error detection and correction.



Model	SDXC UHS-II U3 V90	SDXC/SDHC UHS-I U3 V30 R100	SDXC/SDHC UHS-I U1 Class 10
Capacity	64GB/128GB/256GB/512GB	32GB/64GB/128GB/256GB	16GB/32GB/64GB
Standard	SD5.1 UHS-II	SD5.0 UHS-I	SD3.0 UHS-I
Speed Class	UHS Speed : Class 3 Speed Class : Class 10 Video Speed Class : V90	UHS Speed : Class 3 Speed Class : Class 10 Video Speed Class : V30	UHS Speed : Class 1 Speed Class : Class 10
Sequential Read/Write (MB/s) (Max)*	290/260	100/80	100/25
Dimensions (mm)	(L)24.00 x (W)32.00 x (H)2.10	(L)24.00 x (W)32.00 x (H)2.10	(L)24.00 x (W)32.00 x (H)2.10
Warranty	5 years limited	5 years limited	5 years limited
Applications	  Camera Recorder	  Camera Recorder	 Camera



*The performance may vary due to host hardware, software, usage and storage capacity.












microSD Card

Features

- **Complies with SD Association** - Ensure smooth integration compatibility and stable performance with multiple applications.
- **Waterproof, Anti-drop, Anti-magnetic, and Anti-X-ray** - Protect precious data in demanding environments.









Model	microSD Express	Hyper Speed microSDXC	High Endurance microSDHC/SDXC
Capacity	128GB/256GB	256GB/512GB/1TB	32GB/64GB/128GB/256GB
Standard	SD7.1 UHS-I	SD6.1 UHS-I	SD5.1 UHS-I
Speed Class	UHS Speed : Class 3 Speed Class : Class 10 Video Speed Class : V30 Application Performance Class : A1	UHS Speed : Class 3 Speed Class : Class 10 Video Speed Class : V30 Application Performance Class : A2	UHS Speed : Class 3 Speed Class : Class 10 Video Speed Class : V30
Sequential Read/Write (MB/s) (Max)*	810/700	200/160	100/80
Dimensions (mm)	(L)15.00 x (W)11.00 x (H)1.00	(L)15.00 x (W)11.00 x (H)1.00	(L)15.00 x (W)11.00 x (H)1.00
Warranty	5 years limited	5 years limited	3 years limited
Applications	<div><div> Handheld</div><div> GoPro</div><div> Drone</div><div> Camera</div><div> GoPro</div><div> Drone</div><div> Dashcam</div><div> Surveillance</div><div> GoPro</div></div>		

*The performance may vary due to host hardware, software, usage and storage capacity.





Model	microSDXC UHS-I U3 V30 A2	microSDXC UHS-I U3 V30 A1 Gaming Card	microSDXC/SDHC UHS-I U1 V10 A1 R100
Capacity	64GB/128GB/256GB/ 512GB/1TB/2TB	64GB/128GB/256GB/512GB	32GB/64GB/128GB/256GB
Standard	SD6.1 UHS-I	SD5.1 UHS-I	SD5.1 UHS-I
Speed Class	UHS Speed : Class 3 Speed Class : Class 10 Video Speed Class : V30 Application Performance Class : A2	UHS Speed : Class 3 Speed Class : Class 10 Video Speed Class : V30 Application Performance Class : A1	UHS Speed: Class 1 Video Speed: Class 10 Application Performance Class : A1
Sequential Read/Write (MB/s) (Max)*	100/80	100/80	100/25
Dimensions (mm)	(L)15.00 x (W)11.00 x (H)1.00	(L)15.00 x (W)11.00 x (H)1.00	(L)15.00 x (W)11.00 x (H)1.00
Warranty	5 years limited	5 years limited	5 years limited
Applications	 Mobile Phone  GoPro  Drone	 Handheld	 Camera  Mobile Phone

*The performance may vary due to host hardware, software, usage and storage capacity.









USB Flash Drive

Features


- **Various Styles and Types for Choice** - Dual connector, super mini, capless, pen cap USB to meet various demand.
- **COB (Chip on Board) Technology** - The super-mini USB features a multi-proof design, offering waterproof, dustproof, and shockproof protection to safeguard users' valuable data.










Model	AH15J	AH155	AH11J
Capacity	32GB/64GB/128GB	32GB/64GB/128GB	32GB/64GB
Interface	SuperSpeed USB 3.2 Gen1 (5Gb/s)*, backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (5Gb/s)*, backward compatible with USB 2.0	USB 2.0
Color	Red	Blue	Green
Material	Metal	Metal	Metal
System Supported	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above
Connector	USB-A	USB-A	USB-A
Dimensions (mm)	(L)32.40 x (W)12.00 x (H)4.50	(L)24.30 x (W)12.00 x (H)4.50	(L)32.40 x (W)12.00 x (H)4.50
Weight	3.5g	2.4g	3.5g
Warranty	5 years limited	5 years limited	5 years limited
Features	  Super-mini Strap Hole	  Super-mini Strap Hole	  Super-mini Strap Hole

*The performance may vary due to host hardware, software, usage and storage capacity.












Model	AH112	AH111	AH357
Capacity	32GB/64GB	32GB/64GB	32GB/64GB/128GB
Interface	USB 2.0	USB 2.0	SuperSpeed USB 3.2 Gen1 (5Gb/s)*, backward compatible with USB 2.0
Color	Red	Crystal/Blue	Blue
Material	Metal	Metal	Plastic
System Supported	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above
Connector	USB-A	USB-A	USB-A
Dimensions (mm)	(L)24.30 x (W)12.00 x (H)4.50	(L)24.70 x (W)12.20 x (H)4.60	(L)55.50 x (W)17.10 x (H)11.00
Weight	2.5g	2.5g	7.7g
Warranty	5 years limited	5 years limited	5 years limited
Features	 Super-mini  Strap Hole	 Super-mini  Strap Hole	 Capless  Strap Hole  360° Swivel

*The performance may vary due to host hardware, software, usage and storage capacity.












Model	AH356	AH350	AH335
Capacity	32GB/64GB	32GB/64GB/128GB	32GB/64GB
Interface	SuperSpeed USB 3.2 Gen1 (5Gb/s)*, backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (5Gb/s)*, backward compatible with USB 2.0	USB 2.0
Color	Black	Black	Green
Material	Plastic	Plastic	Plastic
System Supported	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above
Connector	USB-A	USB-A	USB-A
Dimensions (mm)	(L)53.90 x (W)20.90 x (H)8.80	(L)53.40x (W)23.20 x (H)7.50	(L)55.50 x (W)17.10 x (H)11.00
Weight	8.5g	8g	7.5g
Warranty	5 years limited	5 years limited	5 years limited
Features	  Capless Strap Hole	  Capless Sliding Push Key	   Capless Strap Hole 360° Swivel

*The performance may vary due to host hardware, software, usage and storage capacity.







Model	AH334	AH355	AH353
Capacity	32GB/64GB	32GB/64GB/128GB/ 256GB/512GB	32GB/64GB/128GB
Interface	USB 2.0	SuperSpeed USB 3.2 Gen1 (5Gb/s)*, backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (5Gb/s)*, backward compatible with USB 2.0
Color	Blue/Pink	Black	Champagne Gold
Material	Plastic	Plastic	Plastic
System Supported	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above	- Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above
Connector	USB-A	USB-A	USB-A
Dimensions (mm)	(L)53.90 x (W)20.90 x (H)8.80	(L)56.05 x (W)18.00 x (H)8.50	(L)59.00 x (W)18.40 x (H)9.10
Weight	8.5g	7.8g	10g
Warranty	5 years limited	5 years limited	5 years limited
Features	 Capless  Strap Hole  Retractable USB	 Pen Cap  Strap Hole	 Pen Cap  Strap Hole

*The performance may vary due to host hardware, software, usage and storage capacity.








Model	AH25C	AH25B
Capacity	32GB/64GB/128GB/256GB	32GB/64GB/128GB/256GB
Interface	SuperSpeed USB 3.2 Gen1 (5Gb/s)*, backward compatible with USB 2.0	SuperSpeed USB 3.2 Gen1 (5Gb/s)*, backward compatible with USB 2.0
Color	Blue/Bronze	Black/Red
Material	Plastic	Plastic
System Supported	<ul style="list-style-type: none"> - Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above 	<ul style="list-style-type: none"> - Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above
Connector	USB-A	USB-A
Dimensions (mm)	(L)51.50 x (W)18.50 x (H)8.20	(L)52.70 x (W)17.00 x (H)8.20
Weight	6.7g	7g
Warranty	5 years limited	5 years limited
Features	 Pen Cap	 Pen Cap

*The performance may vary due to host hardware, software, usage and storage capacity.





Model	AH336	AH333
Capacity	32GB/64GB	32GB/64GB
Interface	USB 2.0	USB 2.0
Color	Black/White	Black/White
Material	Plastic	Plastic
System Supported	<ul style="list-style-type: none"> - Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above 	<ul style="list-style-type: none"> - Windows 11/10/8.1/8 - macOS 10.6.X or above - Linux Kernel 2.6.X or above
Connector	USB-A	USB-A
Dimensions (mm)	(L)59.90 x (W)19.30 x (H)8.50	(L)56.05 x (W)18.00 x (H)8.50
Weight	8.3g	7.8g
Warranty	5 years limited	5 years limited
Features	  Pen Cap Strap Hole	 Pen Cap

*The performance may vary due to host hardware, software, usage and storage capacity.



UDIMM

Features

- **JEDEC-compliant Design** - Ensures seamless compatibility in purpose-built systems.
- **Power Management IC (PMIC) (DDR5 Voltage: 1.1V)** - Efficiently regulates system power load, ensuring stable and reliable power delivery.



DDR5 UDIMM



DDR4 UDIMM

Model	PC5-44800	PC5-38400	PC4-25600	PC4-21300
Form Factor	DDR5 UDIMM	DDR5 UDIMM	DDR4 UDIMM	DDR4 UDIMM
Capacity	8GB/16GB/32GB	8GB/16GB/32GB	8GB/16GB/32GB	4GB/8GB/16GB/32GB
Frequency (MT/s)	5600	4800	3200	2666
Voltage	1.1V	1.1V	1.2V	1.2V
CL Timing	CL46	CL40	CL22	CL19
Pin	288-Pin	288-Pin	288-Pin	288-Pin



DDR4 UDIMM



DDR3 UDIMM

Model	PC4-19200	PC4-17000	PC3-12800	PC3-10600
Form Factor	DDR4 UDIMM	DDR4 UDIMM	DDR3 UDIMM	DDR3 UDIMM
Capacity	4GB/8GB/16GB	4GB/8GB/16GB	2GB/4GB/8GB	2GB/4GB/8GB
Frequency (MT/s)	2400	2133	1600	1333
Voltage	1.2V	1.2V	1.35V/1.5V	1.35V/1.5V
CL Timing	CL17	CL15	CL11	CL11
Pin	288-Pin	288-Pin	240-Pin	240-Pin



SODIMM

Features

- **JEDEC-compliant Design** - Ensures seamless compatibility in purpose-built systems.
- **Power Management IC (PMIC) (DDR5 Voltage: 1.1V)** - Efficiently regulates system power load, ensuring stable and reliable power delivery.



DDR5 UDIMM



DDR4 UDIMM

Model	PC5-44800	PC5-38400	PC4-25600	PC4-21300
Form Factor	DDR5 SODIMM	DDR5 SODIMM	DDR4 SODIMM	DDR4 SODIMM
Capacity	8GB/16GB/32GB	8GB/16GB/32GB	8GB/16GB/32GB	4GB/8GB/16GB/32GB
Frequency (MT/s)	5600	4800	3200	2666
Voltage	1.1V	1.1V	1.2V	1.2V
CL Timing	CL46	CL40	CL22	CL19
Pin	262-Pin	262-Pin	260-Pin	260-Pin



DDR4 UDIMM



DDR3 UDIMM

Model	PC4-19200	PC4-17000	PC3-12800	PC3-10600
Form Factor	DDR4 SODIMM	DDR4 SODIMM	DDR3 SODIMM	DDR3 SODIMM
Capacity	4GB/8GB/16GB	4GB/8GB/16GB	2GB/4GB/8GB	2GB/4GB/8GB
Frequency (MT/s)	2400	2133	1600	1333
Voltage	1.2V	1.2V	1.35V/1.5V	1.35V/1.5V
CL Timing	CL17	CL15	CL11	CL11
Pin	260-Pin	260-Pin	204-Pin	204-Pin





Unlock Unmatched Performance with Apacer Gaming Modules

Take your gaming experience to the next level with Apacer gaming modules. Designed for speed and reliability, they deliver superior performance, ensuring seamless gameplay and a competitive edge.



Gaming Products

Features

- **JEDEC-Compliant Design** - Ensures seamless compatibility purpose-built systems.
- **Power Management IC (PMIC) (DDR5 Voltage: 1.1V)** - Efficiently regulates system power load, ensuring stable and reliable power delivery.
- **Ultra-wide Angle RGB Lighting Diffuser and Synchronization Certification** - Enable users to effortlessly customize patterns that showcase their unique personalities.
- **Easily Overclocking** - Enhance users experience with Intel XMP support.



NOX RGB DDR5

Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC5-64000	DDR5 UDIMM	16GB	32GB	8000MHz	1.45V	38-48-48-84	288-Pin
PC5-60800	DDR5 UDIMM	16GB	32GB	7600MHz	1.45V	36-48-48-84	288-Pin
PC5-57600	DDR5 UDIMM	16GB	32GB	7200MHz	1.45V	34-42-42-84	288-Pin
PC5-54400	DDR5 UDIMM	16GB	32GB	6800MHz	1.4V	36-46-46-84	288-Pin
PC5-51200	DDR5 UDIMM	16GB/32GB	32GB/64GB	6400MHz	1.4V	32-39-39-84 36-48-48-104	288-Pin
PC5-49600	DDR5 UDIMM	16GB/32GB	32GB/64GB	6200MHz	1.35V	40-40-40-76	288-Pin
PC5-48000	DDR5 UDIMM	16GB/32GB	32GB/64GB	6000MHz	1.35V	38-48-48-96	288-Pin
PC5-44800	DDR5 UDIMM	16GB/32GB	32GB/64GB	5600MHz	1.25V	40-40-40-80	288-Pin
PC5-41600	DDR5 UDIMM	16GB/32GB	32GB/64GB	5200MHz	1.25V	40-40-40-80	288-Pin





NOX TUF DDR5

Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC5-54400	DDR5 UDIMM	16GB	32GB	6800MHz	1.4V	36-46-46-84	288-Pin
PC5-51200	DDR5 UDIMM	16GB/32GB	32GB/64GB	6400MHz	1.4V	32-39-39-84 36-48-48-104	288-Pin
PC5-49600	DDR5 UDIMM	16GB/32GB	32GB/64GB	6200MHz	1.35V	40-40-40-76	288-Pin
PC5-48000	DDR5 UDIMM	16GB/32GB	32GB/64GB	6000MHz	1.35V	38-48-48-96	288-Pin
PC5-44800	DDR5 UDIMM	16GB/32GB	32GB/64GB	5600MHz	1.25V	40-40-40-80	288-Pin
PC5-41600	DDR5 UDIMM	16GB/32GB	32GB/64GB	5200MHz	1.25V	40-40-40-80	288-Pin



NOX DDR5

Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC5-54400	DDR5 UDIMM	16GB	32GB	6800MHz	1.4V	36-46-46-84	288-Pin
PC5-51200	DDR5 UDIMM	16GB/32GB	32GB/64GB	6400MHz	1.4V	32-39-39-84 36-48-48-104	288-Pin
PC5-49600	DDR5 UDIMM	16GB/32GB	32GB/64GB	6200MHz	1.35V	40-40-40-76	288-Pin
PC5-48000	DDR5 UDIMM	16GB/32GB	32GB/64GB	6000MHz	1.35V	38-48-48-96	288-Pin
PC5-44800	DDR5 UDIMM	8GB/16GB/32GB	16G/32GB/64GB	5600MHz	1.25V	40-40-40-80	288-Pin
PC5-41600	DDR5 UDIMM	8GB/16GB/32GB	16GB/32GB/64GB	5200MHz	1.25V	40-40-40-80	288-Pin





PANTHER RGB DDR5

Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC5-54400	DDR5 UDIMM	16GB	32GB	6800MHz	1.4V	36-46-46-84	288-Pin
PC5-51200	DDR5 UDIMM	16GB/32GB	32GB/64GB	6400MHz	1.4V	32-39-39-84 36-48-48-104	288-Pin
PC5-49600	DDR5 UDIMM	16GB/32GB	32GB/64GB	6200MHz	1.35V	40-40-40-76	288-Pin
PC5-48000	DDR5 UDIMM	16GB/32GB	32GB/64GB	6000MHz	1.35V	38-48-48-96	288-Pin
PC5-44800	DDR5 UDIMM	16GB/32GB	32GB/64GB	5600MHz	1.25V	40-40-40-80	288-Pin
PC5-41600	DDR5 UDIMM	16GB/32GB	32GB/64GB	5200MHz	1.25V	40-40-40-80	288-Pin



PANTHER DDR5

Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC5-54400	DDR5 UDIMM	16GB	32GB	6800MHz	1.4V	36-46-46-84	288-Pin
PC5-51200	DDR5 UDIMM	16GB/32GB	32GB/64GB	6400MHz	1.4V	32-39-39-84 36-48-48-104	288-Pin
PC5-49600	DDR5 UDIMM	16GB/32GB	32GB/64GB	6200MHz	1.35V	40-40-40-76	288-Pin
PC5-48000	DDR5 UDIMM	16GB/32GB	32GB/64GB	6000MHz	1.35V	38-48-48-96	288-Pin
PC5-44800	DDR5 UDIMM	8GB/16GB/32GB	16GB/32GB/64GB	5600MHz	1.25V	40-40-40-80	288-Pin
PC5-41600	DDR5 UDIMM	8GB/16GB/32GB	16GB/32GB/64GB	5200MHz	1.25V	40-40-40-80	288-Pin





NOX RGB DDR4

Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC4-28800	DDR4 UDIMM	8GB/16GB/32GB	16GB/32GB/64GB	3600MHz	1.35V	18-22-22-38	288-Pin
PC4-25600	DDR4 UDIMM	8GB/16GB/32GB	16GB/32GB/64GB	3200MHz	1.35V	16-20-20-38	288-Pin
PC4-24000	DDR4 UDIMM	8GB/16GB	16GB/32GB	3000MHz	1.35V	16-18-18-38	288-Pin
PC4-21300	DDR4 UDIMM	8GB/16GB	16GB/32GB	2666MHz	1.2V	16-18-18-38	288-Pin



NOX DDR4

Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC4-28800	DDR4 UDIMM	8GB/16GB/32GB	16GB/32GB/64GB	3600MHz	1.35V	18-22-22-38	288-Pin
PC4-25600	DDR4 UDIMM	8GB/16GB/32GB	16GB/32GB/64GB	3200MHz	1.35V	16-20-20-38	288-Pin
PC4-24000	DDR4 UDIMM	8GB/16GB	16GB/32GB	3000MHz	1.35V	16-18-18-38	288-Pin
PC4-21300	DDR4 UDIMM	8GB/16GB	16GB/32GB	2666MHz	1.2V	16-18-18-38	288-Pin





NOX DDR4


Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC4-25600	DDR4 SODIMM	8GB/16GB	16GB/32GB	3200MHz	1.35V	20-22-22-38	260-Pin
PC4-24000	DDR4 SODIMM	8GB/16GB	16GB/32GB	3000MHz	1.35V	18-20-20-38	260-Pin
PC4-21300	DDR4 SODIMM	8GB/16GB	16GB/32GB	2666MHz	1.2V	18-18-18-38	260-Pin



PANTHER Golden DDR4

Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC4-28800	DDR4 UDIMM	8GB/16GB/32GB	16GB/32GB/64GB	3600MHz	1.35V	18-22-22-38	288-Pin
PC4-25600	DDR4 UDIMM	8GB/16GB/32GB	16GB/32GB/64GB	3200MHz	1.35V	16-20-20-38	288-Pin
PC4-24000	DDR4 UDIMM	8GB/16GB	16GB/32GB	3000MHz	1.35V	16-18-18-38	288-Pin
PC4-21300	DDR4 UDIMM	8GB/16GB	16GB/32GB	2666MHz	1.2V	16-18-18-38	288-Pin






TEX DDR4

Model	Form Factor	Capacity		Frequency (MT/s)	Voltage	CL Timing	PIN
		Single Package	Dual Package				
PC4-25600	DDR4 UDIMM	8G/16GB/32GB	-	3200MHz	1.35V	16-20-20-38	288-Pin
PC4-24000	DDR4 UDIMM	8G/16GB	-	3000MHz	1.35V	16-18-18-38	288-Pin
PC4-21300	DDR4 UDIMM	8G/16GB	-	2666MHz	1.2V	16-18-18-38	288-Pin




Unlock your business's potential in the digital era with Apacer.


Learn more at www.apacer.com.



LinkedIn



Website



Contact us

Global Presence

Taiwan (Headquarter)

Apacer Technology Inc.
1F., No.32, Zhongcheng Rd., Tucheng Dist.,
New Taipei City 236, Taiwan R.O.C.
Tel : 886-2-2267-8000
amtsales@apacer.com

U.S.A.

Apacer Memory America, Inc.
46732 Lakeview Blvd., Fremont, CA 94538
Tel : 1-408-518-8699
sa@apacerus.com

Japan

Apacer Technology Corp.
6F, Daiyontamachi Bldg., 2-17-12,
Shibaura, Minato-Ku, Tokyo, 108-0023,
Japan
Tel: 81-3-5419-2668
jpservices@apacer.com

Europe

Apacer Technology B.V.
Science Park Eindhoven 5051 5692 EB Son,
The Netherlands
Tel : 31-40-267-0000
sales@apacer.nl

China

Apacer Electronic (Shanghai) Co., Ltd
501b, Building 2, No. 299 Youle Road,
Changning District, China
Tel : 86-21-6228-9939

India

Apacer Technologies Pvt Ltd.
60/A, Second floor, 7th Main, 8th Cross, 3rd
Phase, J.P Nagar,
Bengaluru - 560078
Karnataka
India
Tel : 91-080-35910296

March © 2025 Apacer. All rights reserved.

Apacer is not responsible for photographic or typographic errors. The information, including model names and specifications contained herein is subject to change without notice. Apacer shall not be liable for technical or editorial errors or omissions contained herein.

